

GAS TRAIN EQUIPMENT


PRODUCT OVERVIEW



WE BELIEVE IN QUALITY

We contribute to increase the Italian
Technology and the Style that countersigns
the excellence of Italy all over the world.

MADE IN ITALY

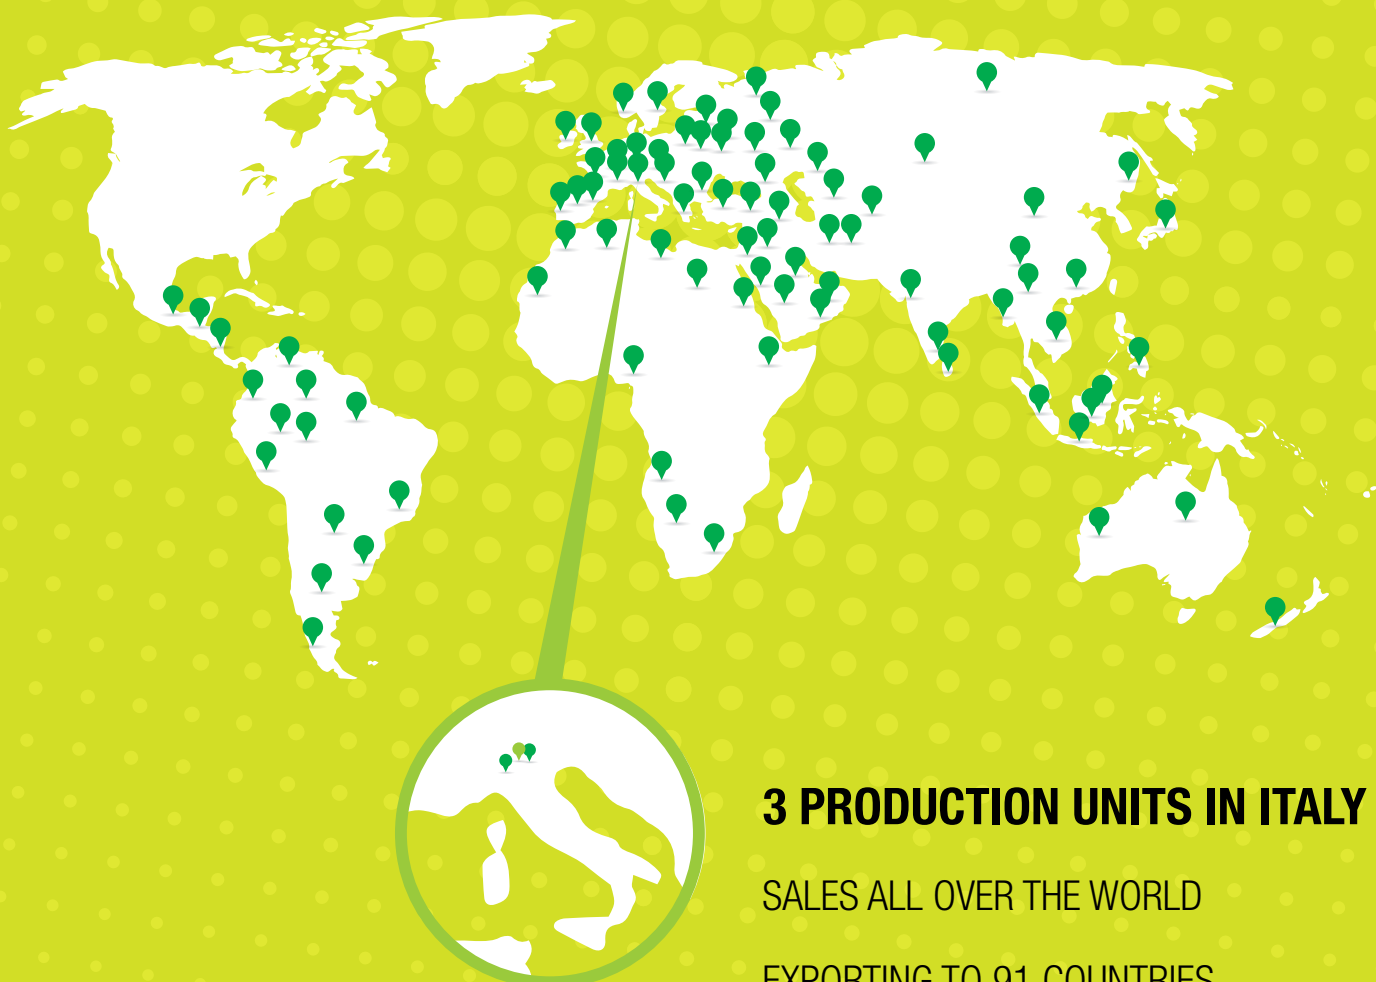

3 PRODUCTION UNITS IN ITALY

SALES ALL OVER THE WORLD

EXPORTING TO 91 COUNTRIES

www.gecasrl.it

GAS GOVERNORS



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN100
Pmax	500 mbar / 1 bar / 2 bar

GAS REGULATORS

WITH SLAM SHUT VALVE INTEGRATED -OPSO / UPSO



TECHNICAL SPECIFICATION

Aluminium

Body

1 1/4" to 2"

Connection

500 mbar / 5 bar

Pmax

ZERO


GOVERNORS



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN100
Pmax	500 mbar / Air/gas ratio: 1:1

GAS FILTERS

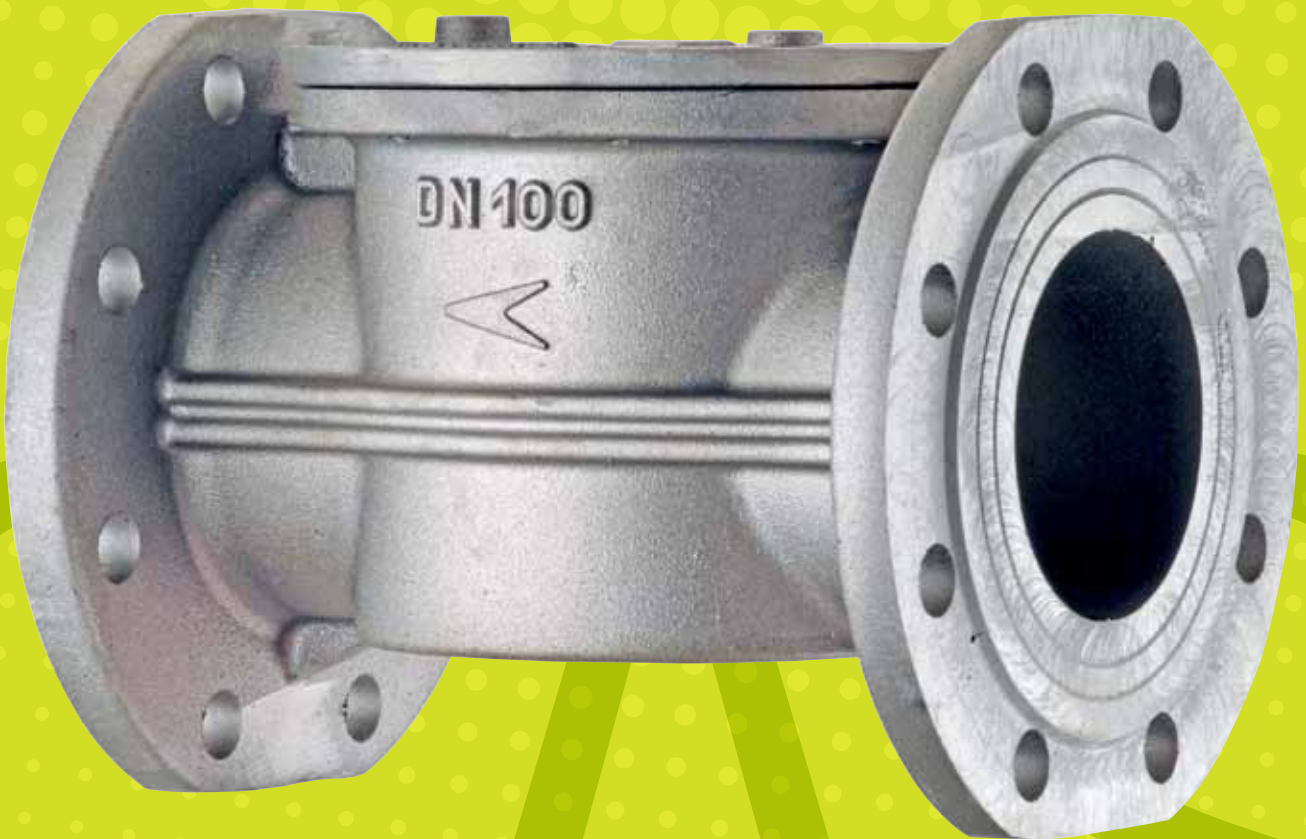

TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN150	Connection
6 bar / 10 bar	Pmax

AUTOMATIC GAS VALVES

FAST OPENING / FAST CLOSING



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN150
Pmax	360 mbar / 6 bar

AUTOMATIC GAS VALVES

SLOW OPENING / FAST CLOSING



TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN100	Connection
360 mbar	Pmax

VENT VALVES

NORMALLY OPEN



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	½" to 1"
Pmax	360 mbar / 6 bar

RELIEF VALVES



TECHNICAL SPECIFICATION

Aluminium

Body

1/2" to 2"

Connection

1 bar

Pmax

SLAM SHUT VALVES



TECHNICAL SPECIFICATION

Body	Brass from 1/2" to 2" - Aluminium from DN65 to DN100
Connection	1/2" to DN100
Pmax	6 bar

JERK VALVES



TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN100	Connection
6 bar	Pmax

MANUAL RESET VALVES



TECHNICAL SPECIFICATION

Body	Brass from 1/2" to 2" - Aluminium from DN65 to DN150
Connection	1/2" to DN150
Pmax	550 mbar / 6 bar

MANUAL REST VALVES

ATEX APPROVED



TECHNICAL SPECIFICATION

Brass from 1/2" to 2" – Aluminium from DN65 to DN150

1/2" to DN150

Pmax 550 mbar / 6 bar

Body

Connection

Pmax

BALL VALVES



TECHNICAL SPECIFICATION

Body	Brass ¼" to 4" (Threaded) / Cast Iron from DN15 to DN200 (Flanged)
Connection	¼" to DN200
Pmax	Depend on dimension

PRESSURE GAUGES



TECHNICAL SPECIFICATION

63 mm / 80 mm / 100 mm

Diameter


1/4" / 3/8" / 1/2"

Connection

from 4 bar to 16 bar / from 40 mbar to 600 mbar

Range

GAS DETECTORS

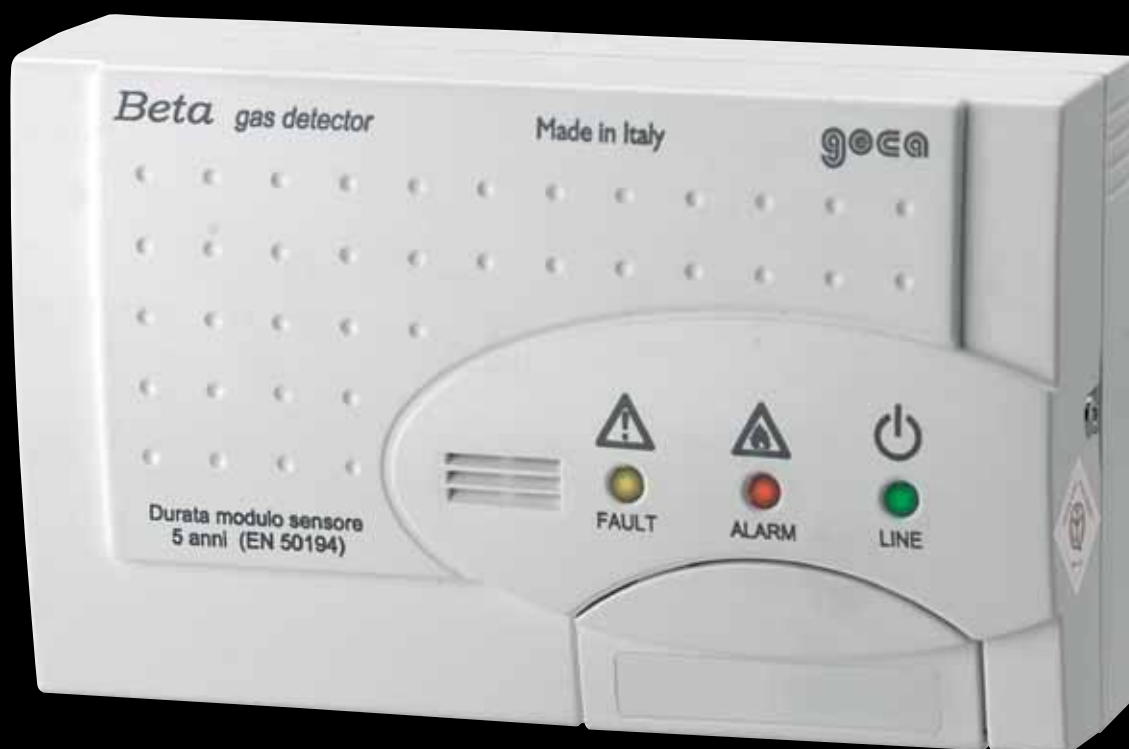

TECHNICAL SPECIFICATION

Applications	Domestic / Commercial / Industrial
Type	Stand alone detector / Trasmittente 4 - 20 mA / RS485
Gases	Natural Gas - LPG - Co - Up to 96 different gases between flammable and toxic



geca

GECA S.r.l.
Via E. Fermi, 98 | 25064 Gussago (BS) | Italy
Tel. +39 030 3730218
Fax +39 030 3730228
E-mail: export@gecasrl.it
www.gecasrl.it

**Tecno
control**

Tecnocontrol S.r.l.
Via Miglioli, 47 | 20090 Milano | Italy
Tel. +39 02 26922890
Fax +39 02 2133734
E-mail: export@tecnocontrol.it
www.tecnocontrol.it