

GAS TRAIN EQUIPMENT

PRODUCT OVERVIEW

Tecno
control

geca

FAG

WE BELIEVE IN QUALITY

We contribute to increase the Italian
Technology and the Style that distinguish
the excellence of Italy all over the world.

MADE IN ITALY



3 PRODUCTION UNITS IN ITALY

SALES ALL OVER THE WORLD

EXPORTING TO 91 COUNTRIES

www.gecasrl.it

GAS GOVERNORS




TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN100
Pmax	500 mbar / 1 bar / 2 bar / 5 bar

GAS REGULATORS

WITH SLAM SHUT VALVE INTEGRATED -OPSO / UPSO

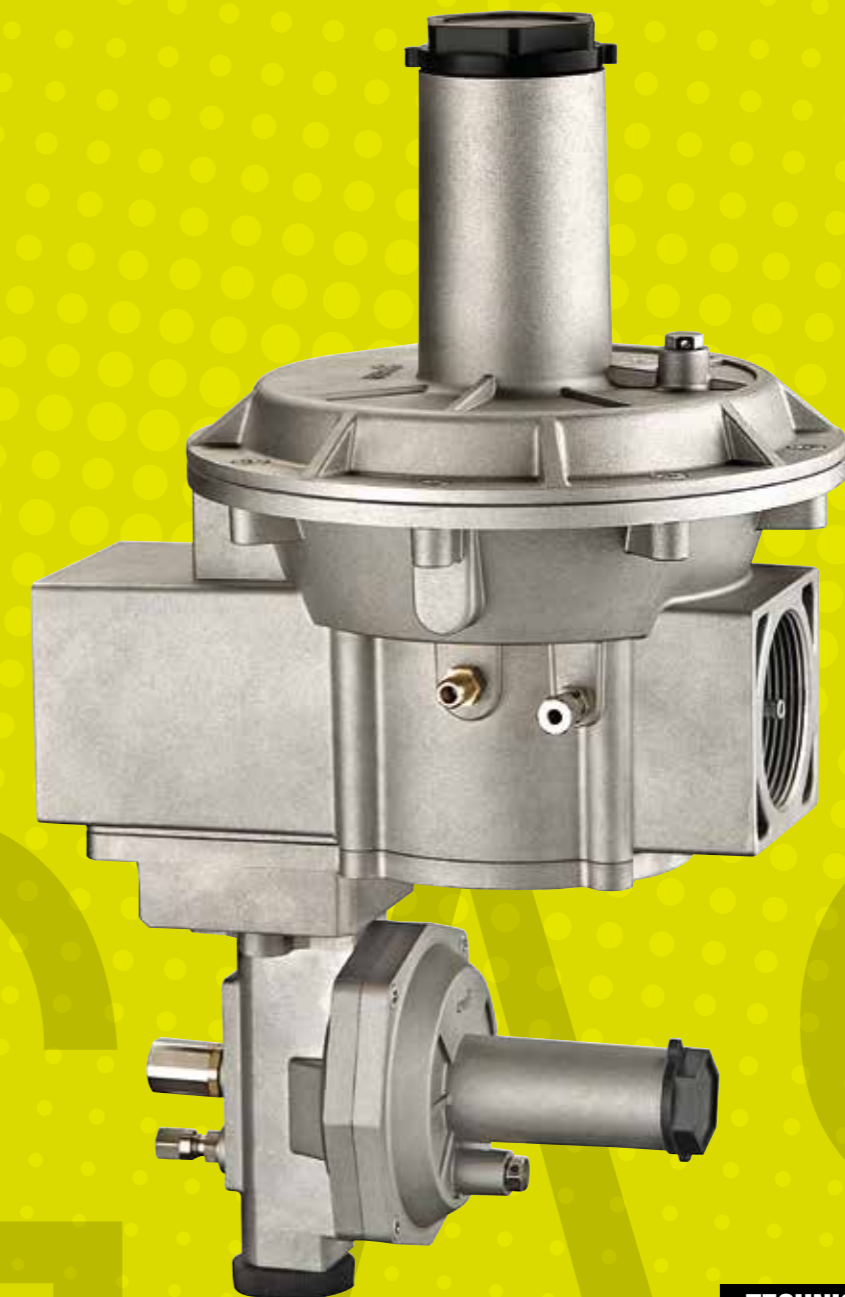

TECHNICAL SPECIFICATION

Aluminium	Body
1 1/4" to 2"	Connection
500 mbar / 5 bar	Pmax


ZERO GOVERNORS



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN100
Pmax	500 mbar / Air/gas ratio: 1:1

GAS FILTERS

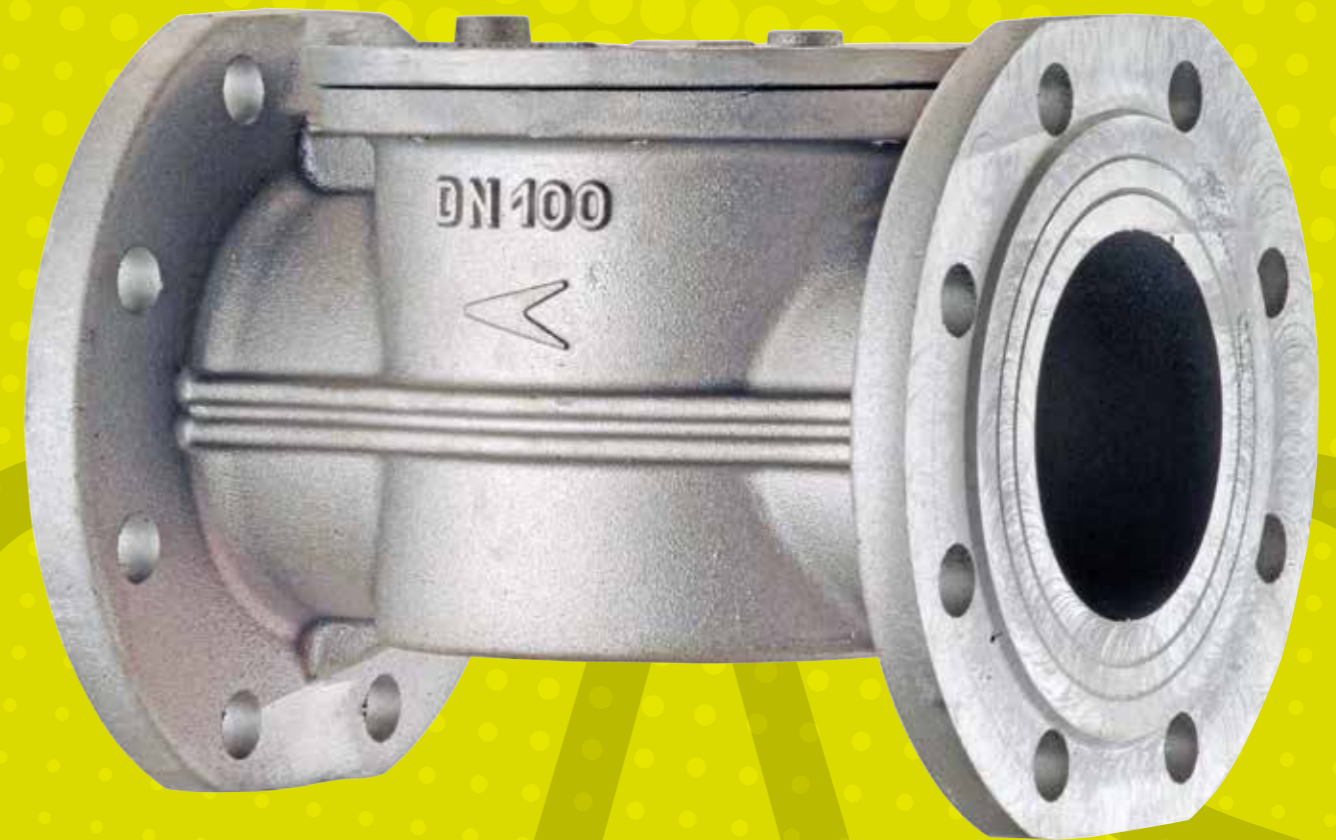

TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN150	Connection
6 bar / 10 bar	Pmax

AUTOMATIC GAS VALVES

FAST OPENING / FAST CLOSING



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to DN100
Pmax	360 mbar / 6 bar

AUTOMATIC GAS VALVES

SLOW OPENING / FAST CLOSING



TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN100	Connection
360 mbar	Pmax

VENT VALVES


NORMALLY OPEN



TECHNICAL SPECIFICATION

Body	Aluminium
Connection	1/2" to 1"
Pmax	360 mbar / 6 bar

RELIEF VALVES

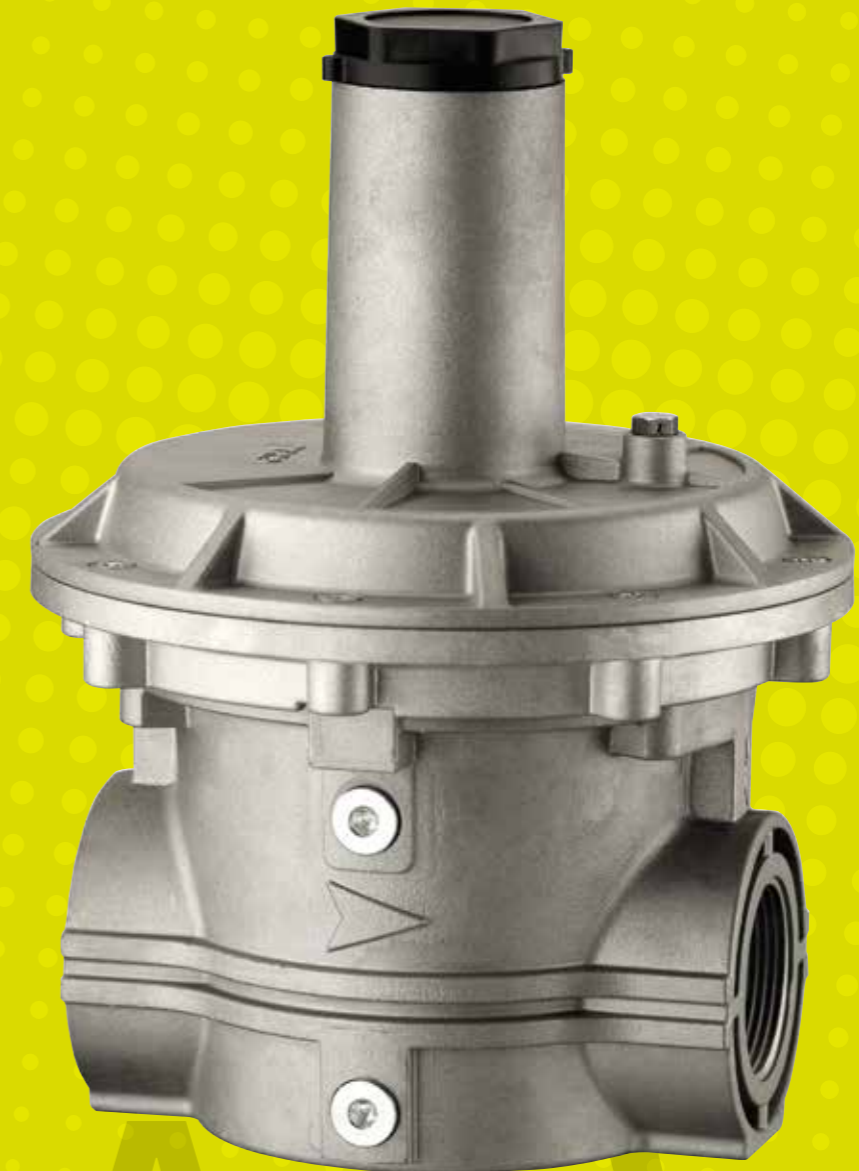

TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to 2"	Connection
1 bar	Pmax

SLAM SHUT VALVES



TECHNICAL SPECIFICATION

Body	Brass from 1/2" to 2" - Aluminium from DN65 to DN100
Connection	1/2" to DN100
Pmax	6 bar

JERK VALVES



TECHNICAL SPECIFICATION

Aluminium	Body
1/2" to DN100	Connection
6 bar	Pmax

MANUAL RESET VALVES

ATEX APPROVED AVAILABLE



TECHNICAL SPECIFICATION

Body	Brass from 1/2" to 2" - Aluminium from DN65 to DN150
Connection	1/2" to DN150
Pmax	550 mbar / 6 bar

BALL VALVES



TECHNICAL SPECIFICATION

Brass 1/4" to 4" (Threaded) / Cast Iron from DN15 to DN200 (Flanged)	Body
1/4" to DN200	Connection
Depend on dimension	Pmax

PRESSURE GAUGES



TECHNICAL SPECIFICATION

Body	63 mm / 80 mm / 100 mm
Connection	1/4" / 3/8" / 1/2"
Pmax	from 4 bar to 16 bar / from 40 mbar to 600 mbar


OIL FILTERS



TECHNICAL SPECIFICATION

Aluminum / Plastic	Body
15 / 44 / 60 / 100 / 200 / 300 µm	Filtration degree
1/4" to 1 1/2"	Connection

GAS DETECTORS

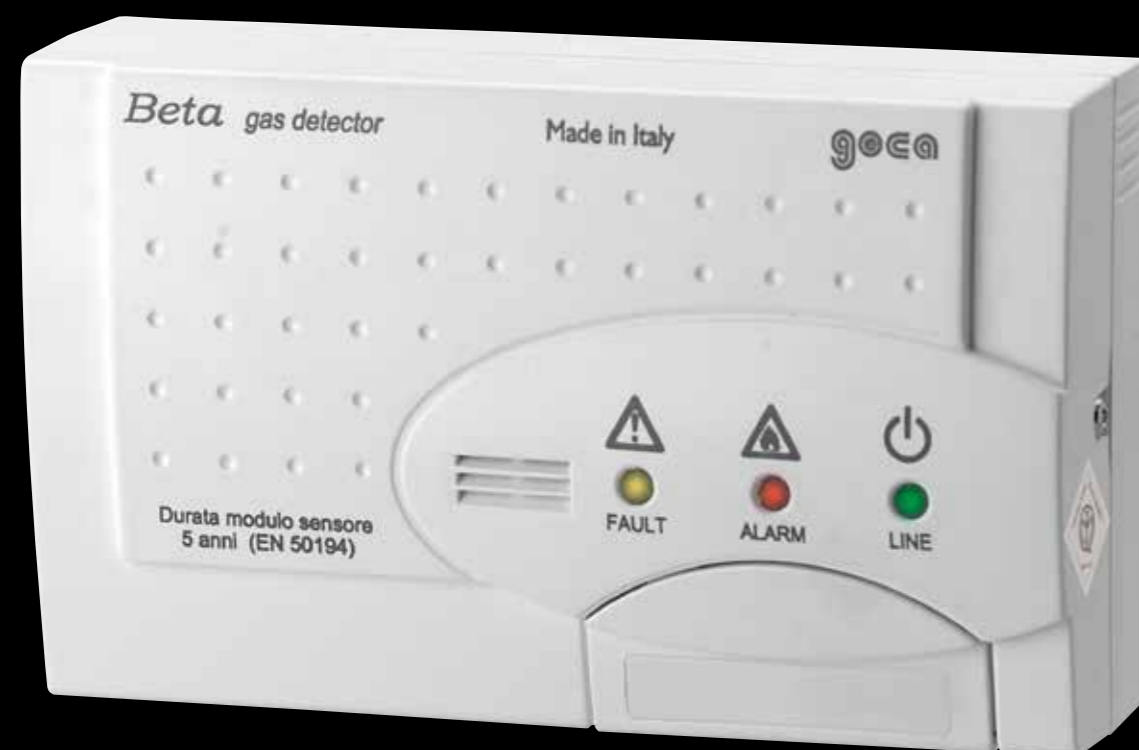

TECHNICAL SPECIFICATION

Applications	Domestic / Commercial / Industrial
Type	Stand alone detector / Trasmittente 4 - 20 mA / RS485
Gases	Natural Gas - LPG - Co - Up to 96 different gases between flammable and toxic



Technocontrol S.r.l.
Via Miglioli, 47 | 20090 Milano | Italy
Tel. +39 02 26922890
Fax +39 02 2133734
E-mail: export@tecnoccontrol.it
www.tecnoccontrol.it



GECA S.r.l.
Via E. Fermi, 98 | 25064 Gussago (BS) | Italy
Tel. +39 030 3730218
Fax +39 030 3730228
E-mail: export@gecasrl.it
www.gecasrl.it



FAG
Via E. Fermi, 98 | 25064 Gussago (BS) | ITALY
Tel. +39 030 3730218
Fax +39 030 3730228
E-mail: info@fagonline.com
www.fagonline.com